

Make  
会社名 NISSAN


Model  
型式 EK10

No Homol. **A-5389**

No Ext. **01/01V0**

JAF公認番号 JA-127V0- 1/1

Page or ext. ページまたは補足	Art. 項目	Description 記述
8, 9, 13	803	<u>Brakes</u> Front and/or rear brake disc (Grooved and/or crossdrilled)
	Photo VW9	g) Disc brakes
		g4) Maximum disc thickness
		1 20.7mm
		2 22.9mm
		3 25.4mm
		4 28.0mm
		g5) Exterior diameter of the disc
		g6) Exterior diameter of the shoe's rubbing surface
		g7) Interior diameter of the shoe's rubbing surface
		g9) Ventilated disc
		Parts number
		1 CP2261A1
		2 CP2261A2
		3 CP2261A3
		4 CP2261A4
		<u>Brakes</u> Front and/or rear brake disc (Grooved and/or crossdrilled)
		g) Disc brakes
		g4) Maximum disc thickness
		1 20.7mm
		2 22.9mm
	3 25.4mm	
	4 28.0mm	
	g5) Exterior diameter of the disc	
	g6) Exterior diameter of the shoe's rubbing surface	
	g7) Interior diameter of the shoe's rubbing surface	
	g9) Ventilated disc	
	Parts number	
	1 CP3099E1	
	2 CP3099E2	
	3 CP3099E3	
	4 CP3099E4	

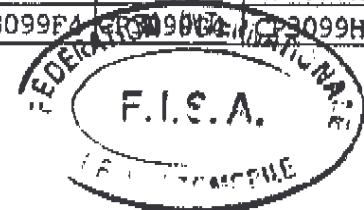

Make  
会社名 NISSAN

Model  
型式 EK10

No Homol. A-5389

No Ext. 01/01V0

JAF公認番号 JA-127V0-1/1

Page or ext. ページまたは補足	Art. 項目	Description 記述																																																																																	
8, 9, 13	803	<p><u>Brakes</u></p> <p>Front and/or rear brake disc (Grooved and/or crossdrilled)</p> <table border="1"> <thead> <tr> <th>g) Disc brakes</th> <th>Type I</th> <th>Type J</th> <th>Tolerances</th> </tr> </thead> <tbody> <tr> <td rowspan="4">g4) Maximum disc thickness</td> <td>1</td> <td>20.7mm</td> <td>20.7mm</td> </tr> <tr> <td>2</td> <td>22.9mm</td> <td>22.9mm</td> </tr> <tr> <td>3</td> <td>25.4mm</td> <td>25.4mm</td> </tr> <tr> <td>4</td> <td>28.0mm</td> <td>28.0mm</td> </tr> <tr> <td colspan="3">g5) Exterior diameter of the disc</td> <td>± 1.0mm</td> </tr> <tr> <td colspan="3">g6) Exterior diameter of the shoes rubbing surface</td> <td>± 1.5mm</td> </tr> <tr> <td colspan="3">g7) Interior diameter of the shoes rubbing surface</td> <td>± 1.5mm</td> </tr> <tr> <td colspan="3">g9) Ventilated disc</td> <td>yes</td> </tr> <tr> <td rowspan="4">Parts number</td> <td>1</td> <td>CP3047I1</td> <td>CP3047J1</td> </tr> <tr> <td>2</td> <td>CP3047I2</td> <td>CP3047J2</td> </tr> <tr> <td>3</td> <td>CP3047I3</td> <td>CP3047J3</td> </tr> <tr> <td>4</td> <td>CP3047I4</td> <td>CP3047J4</td> </tr> </tbody> </table> <p>Photo VW9</p> <p>Front and rear brake disc ( Grooved and/or crossdrilled)</p> <table border="1"> <thead> <tr> <th>g) Disc brakes</th> <th>Type K</th> </tr> </thead> <tbody> <tr> <td>g4) Maximum disc thickness</td> <td>20.7 ± 1.0mm</td> </tr> <tr> <td>g5) Exterior diameter of the disc</td> <td>257.7 ± 1.5mm</td> </tr> <tr> <td>g6) Exterior diameter of the shoes rubbing surface</td> <td>256.7 ± 1.5mm</td> </tr> <tr> <td>g7) Interior diameter of the shoes rubbing surface</td> <td>164.3 ± 1.5mm</td> </tr> <tr> <td>g9) Ventilated disc</td> <td>yes</td> </tr> <tr> <td>Parts number</td> <td>CP2261-K1</td> </tr> </tbody> </table> <p>Photo VW10</p> <p>Front and rear brake disc</p> <table border="1"> <thead> <tr> <th>g) Disc brakes</th> <th>Front (Type L)</th> <th>Rear (Type L)</th> </tr> </thead> <tbody> <tr> <td>g4) Maximum disc thickness</td> <td>18.0 ± 1.0mm</td> <td>10.0 ± 1.0mm</td> </tr> <tr> <td>g5) Exterior diameter of the disc</td> <td>240.0 ± 1.5mm</td> <td>234.0 ± 1.5mm</td> </tr> <tr> <td>g6) Exterior diameter of the shoes rubbing surface</td> <td>238.6 ± 1.5mm</td> <td>233.0 ± 1.5mm</td> </tr> <tr> <td>g7) Interior diameter of the shoes rubbing surface</td> <td>162.0 ± 1.5mm</td> <td>175.0 ± 1.5mm</td> </tr> <tr> <td>g9) Ventilated disc</td> <td>yes</td> <td>no</td> </tr> <tr> <td>Parts number</td> <td>42202-53A01</td> <td>42202-53A01</td> </tr> </tbody> </table> <p>Front Photo V11</p> <p>Rear Photo W11</p>	g) Disc brakes	Type I	Type J	Tolerances	g4) Maximum disc thickness	1	20.7mm	20.7mm	2	22.9mm	22.9mm	3	25.4mm	25.4mm	4	28.0mm	28.0mm	g5) Exterior diameter of the disc			± 1.0mm	g6) Exterior diameter of the shoes rubbing surface			± 1.5mm	g7) Interior diameter of the shoes rubbing surface			± 1.5mm	g9) Ventilated disc			yes	Parts number	1	CP3047I1	CP3047J1	2	CP3047I2	CP3047J2	3	CP3047I3	CP3047J3	4	CP3047I4	CP3047J4	g) Disc brakes	Type K	g4) Maximum disc thickness	20.7 ± 1.0mm	g5) Exterior diameter of the disc	257.7 ± 1.5mm	g6) Exterior diameter of the shoes rubbing surface	256.7 ± 1.5mm	g7) Interior diameter of the shoes rubbing surface	164.3 ± 1.5mm	g9) Ventilated disc	yes	Parts number	CP2261-K1	g) Disc brakes	Front (Type L)	Rear (Type L)	g4) Maximum disc thickness	18.0 ± 1.0mm	10.0 ± 1.0mm	g5) Exterior diameter of the disc	240.0 ± 1.5mm	234.0 ± 1.5mm	g6) Exterior diameter of the shoes rubbing surface	238.6 ± 1.5mm	233.0 ± 1.5mm	g7) Interior diameter of the shoes rubbing surface	162.0 ± 1.5mm	175.0 ± 1.5mm	g9) Ventilated disc	yes	no	Parts number	42202-53A01	42202-53A01
g) Disc brakes	Type I	Type J	Tolerances																																																																																
g4) Maximum disc thickness	1	20.7mm	20.7mm																																																																																
	2	22.9mm	22.9mm																																																																																
	3	25.4mm	25.4mm																																																																																
	4	28.0mm	28.0mm																																																																																
g5) Exterior diameter of the disc			± 1.0mm																																																																																
g6) Exterior diameter of the shoes rubbing surface			± 1.5mm																																																																																
g7) Interior diameter of the shoes rubbing surface			± 1.5mm																																																																																
g9) Ventilated disc			yes																																																																																
Parts number	1	CP3047I1	CP3047J1																																																																																
	2	CP3047I2	CP3047J2																																																																																
	3	CP3047I3	CP3047J3																																																																																
	4	CP3047I4	CP3047J4																																																																																
g) Disc brakes	Type K																																																																																		
g4) Maximum disc thickness	20.7 ± 1.0mm																																																																																		
g5) Exterior diameter of the disc	257.7 ± 1.5mm																																																																																		
g6) Exterior diameter of the shoes rubbing surface	256.7 ± 1.5mm																																																																																		
g7) Interior diameter of the shoes rubbing surface	164.3 ± 1.5mm																																																																																		
g9) Ventilated disc	yes																																																																																		
Parts number	CP2261-K1																																																																																		
g) Disc brakes	Front (Type L)	Rear (Type L)																																																																																	
g4) Maximum disc thickness	18.0 ± 1.0mm	10.0 ± 1.0mm																																																																																	
g5) Exterior diameter of the disc	240.0 ± 1.5mm	234.0 ± 1.5mm																																																																																	
g6) Exterior diameter of the shoes rubbing surface	238.6 ± 1.5mm	233.0 ± 1.5mm																																																																																	
g7) Interior diameter of the shoes rubbing surface	162.0 ± 1.5mm	175.0 ± 1.5mm																																																																																	
g9) Ventilated disc	yes	no																																																																																	
Parts number	42202-53A01	42202-53A01																																																																																	

